

Catalog Number	
Project Notes	

Wing Pendant

Features & Functionality

- Purpose** Cable mounted linear LED fixture for indoor IP20 projects
- Concept** High output LED luminaire in a standard 4ft housing package for new construction and retrofit applications
- Material** Extruded Aluminum and Steel body with frosted lens
- Finish** Available in White polycarbonate finish
- Mounting** Cable Mount
- Color Temp.** 3000°K, 3500°K, 4000°K and 5000°K available
- Beam Spread** 120° standard
- Output** Up to 6480 Lumens
- Dimming** 0-10V, compatible with most dimming systems
- Voltage** 100 – 277 VAC
- Lifespan** 50,000 hours
- Warranty** 5-year warranty



Features frosted polycarbonate lens

Lumen Information

LUMENS	WATTAGE	EFFICACY
3,600Lm	30W	120Lm/W
4,320Lm	36W	120Lm/W
5,400Lm	45W	120Lm/W
6,480Lm	54W	120Lm/W



Product Selection Guide


Example: **AT-PD-W-30-35-WH**

PRODUCT	SERIES	WATTAGE	COLOR TEMP	BODY COLOR
AT-PD – Attain Pendant	W – Wing	30 – 30W	30 – 3000°K	WH – White
		36 – 36W	35 – 3500°K	
		45 – 45W	40 – 4000°K	
		54 – 54W	50 – 5000°K	

Cable Suspension Kit available



Dimensional Information

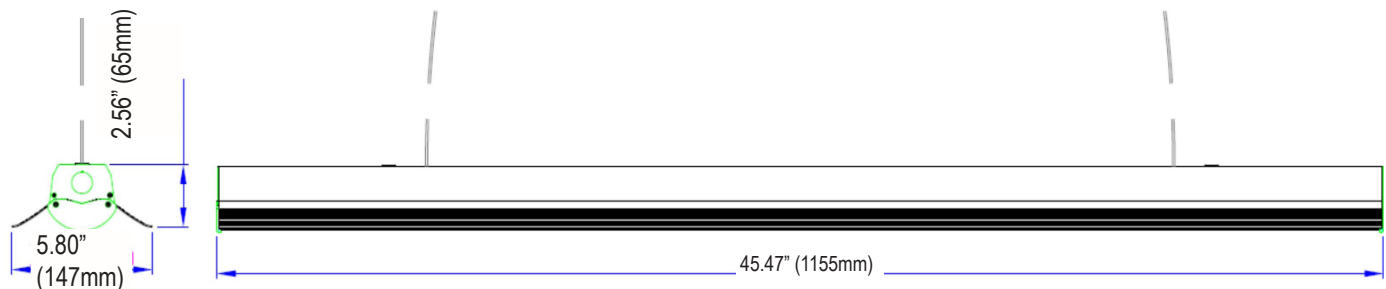


Catalog Number	
Project Notes	


Wing Pendant

PHOTOMETRY


AT-PD-30W_IESNA2002

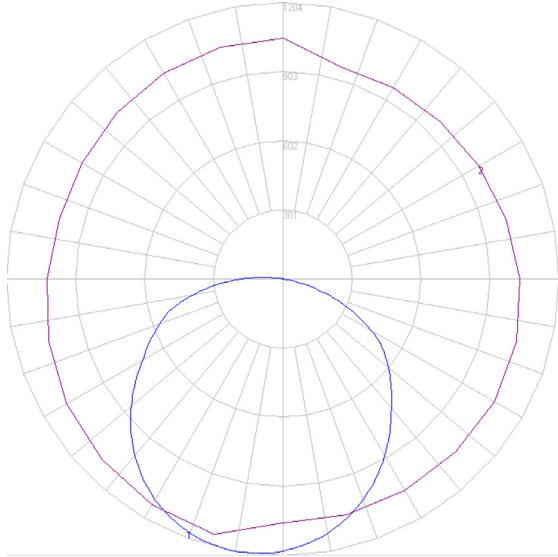

AT-PD-36W_IESNA2002

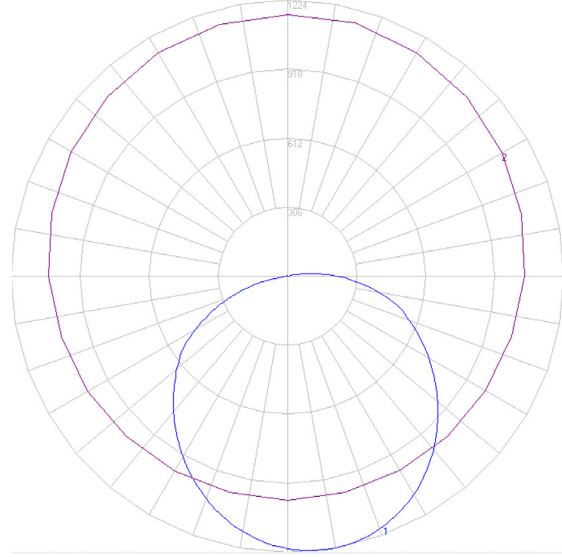

AT-PD-45W_IESNA2002

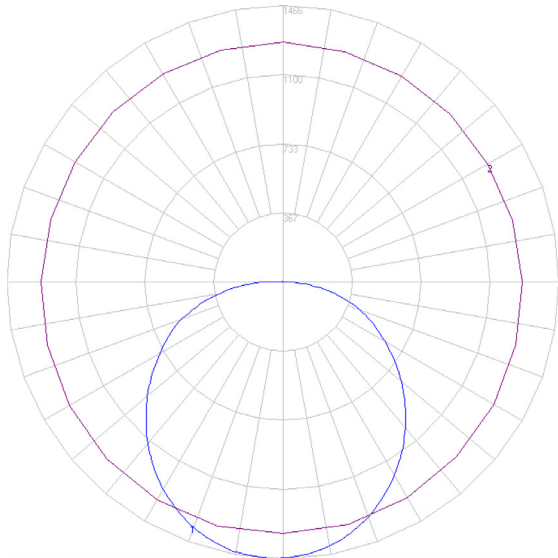

AT-PD-54W_IESNA2002

