

Catalog Number	
Project Notes	

LED Edge Lit Panel 2'x2'

Features & Functionality

- Purpose** 2'x2' T-bar retrofit LED panel for indoor IP20 projects.
 - Material** Extruded aluminum body with polycarbonate lens
 - Finish** Available in white or black trim
 - Mounting** Standard suspended T-Bar retrofit mount, suspended with cable kit, built in Earthquake clips
 - Color Temp.** 3500°K, 3700°K, 4000°K and 5000°K.
 - Beam Spread** 120° beam angle, edge lit with integral diffusor lens for no points of light
 - Output** 2'x2' model: up to 4,680 Lumens
 - Dimming** 0-10V, compatible with most dimming systems
 - Voltage** 100 – 277 VAC
 - Warranty** 5-year warranty
- L70 Calculated Life (Hrs): 215,000****



Lumen Information

SERIES	LUMENS	WATTAGE	EFFICACY
22	3,250	25	130Lm/W
22	3,900	30	130Lm/W
22	4,680	36	130Lm/W



Product Selection Guide



Example: AT-PN-22-36-40-W

PRODUCT	SERIES	WATTAGE	COLOR TEMP	COLOR	OPTIONS
AT-PN – Attain LED Panel	22 – 2'x2' Square	25 – 25W	35 – 3500°K	W – White	EM- Emergency Battery Backup
		30 – 30W	37 – 3700°K	B – Black	
		36 – 36W	40 – 4000°K		
			50 – 5000°K		

Cable Suspension Kit available



Dimensional Information

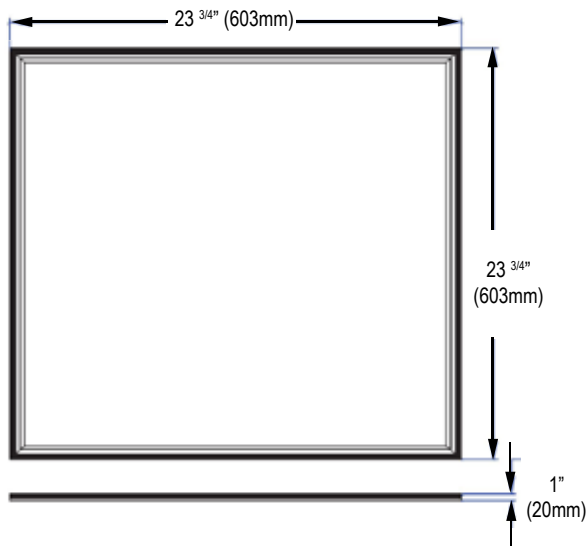

**Projected LED lumen maintenance based on the IES TM-21 model. Calculation is based on 6,000 hours of LM-80 data.

LED Panel 2'x2'

PHOTOMETRY

2'x2' LED Panel AT-PN-22-XX

